

PAT-NO: JP407052428A  
DOCUMENT-IDENTIFIER: JP 07052428 A  
TITLE: PRINTER

PUBN-DATE: February 28, 1995

**INVENTOR-INFORMATION:**

NAME	COUNTRY
KONO, NOBUO	
KOBAYASHI, YOICHI	
TAKANO, HIROAKI	
YAMAZAKI, MASAHIKO	
YAMAZAKI, SATORU	
KONNAI, TOSHIHIKO	

**ASSIGNEE-INFORMATION:**

NAME	COUNTRY
SONY CORP	N/A
COPAL CO LTD	N/A

APPL-NO: JP05228277

APPL-DATE: August 21, 1993

INT-CL (IPC): B41J002/325 , B41J013/00 , B41J029/00 , B41J035/16 , B41M005/26

**ABSTRACT:**

PURPOSE: To prevent forgery and alteration by a laminate formed on a photographic face by means of a simple constitution and improve the design effect thereof.

CONSTITUTION: Forgery and alteration can be prevented by a laminate formed on a printing face by means of a simple constitution and the design effect can be improved by coating over the printing face of a printing medium 37 while a printing pattern for one printing face stored in a memory 86 is formed on a film-like sheet F by means of a heat transfer head.

COPYRIGHT: (C)1995,JPO

Document Identifier - DID (1):

JP 07052428 A

**Best Available Copy**

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号

特開平7-52428

(43) 公開日 平成7年(1995)2月28日

(51) Int.Cl. <sup>8</sup>	識別記号	庁内整理番号	F I	技術表示箇所
B 4 1 J	2/325			
	13/00			
	29/00			
		B 4 1 J	3/ 20	1 1 7 C
			29/ 00	H
審査請求 未請求 請求項の数3 F D (全 9 頁) 最終頁に続く				

(21) 出願番号 特願平5-228277

(22) 出願日 平成5年(1993)8月21日

(71) 出願人 000002185

ソニー株式会社

東京都品川区北品川6丁目7番35号

(71) 出願人 000001225

株式会社コバル

東京都板橋区志村2丁目16番20号

(72) 発明者 河野 信雄

東京都品川区北品川6丁目7番35号ソニー

株式会社内

(72) 発明者 小林 洋一

東京都品川区北品川6丁目7番35号ソニー

株式会社内

(74) 代理人 弁理士 田辺 直基


最終頁に続く

(54) 【発明の名称】 印刷装置

(57) 【要約】

【目的】本発明は、印刷装置に関し、簡易な構成で印画面上に形成したラミネートで偽造や改ざんを防止すると共に意匠的效果を向上する。

【構成】熱転写ヘッドでフィルム状シートFにメモリ手段86に記憶された1印画面分の印刷パターンを形成しながら印刷媒体37の印画面上を覆うようにしたことにより、簡易な構成で印画面上に形成したラミネートで偽造や改ざんを防止すると共に意匠的效果を向上し得る。

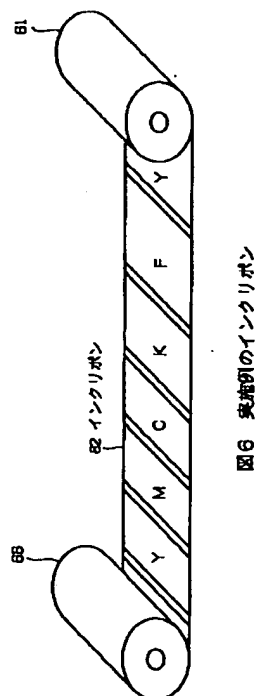

## 【特許請求の範囲】

【請求項1】インクリボン上に配された色インクで所定の印刷媒体の印画面上に所定の印刷を行うと共に、上記インクリボン上に上記色インクに続いて配されたフィルム状シートを熱転写ヘッドで上記印画面上に転写する印刷装置において、

上記フィルム状シートを上記熱転写ヘッドで転写する際に、1印画面分の印刷パターンを記憶するメモリ手段を具え、上記熱転写ヘッドで上記フィルム状シートに上記印刷パターンを形成しながら上記印刷媒体の上記印画面上を覆うようにしたことを特徴とする印刷装置。

【請求項2】上記メモリ手段は、上記色インクに応じた1画面分の印刷パターンをそれぞれ記憶する色メモリ手段と別に設けるようにしたことを特徴とする請求項1に記載の印刷装置。

【請求項3】上記メモリ手段は、上記色インクに応じた1画面分の印刷パターンを時分割で記憶する色メモリ手段と兼用するようにしたことを特徴とする請求項1に記載の印刷装置。

## 【発明の詳細な説明】

## 【0001】

【目次】以下の順序で本発明を説明する。

産業上の利用分野

従来の技術

発明が解決しようとする課題

課題を解決するための手段（図6及び図7）

作用（図6及び図7）

実施例

（1）カード印刷装置の全体構成（図1～図5）

（2）実施例のカード印刷装置（図3、図6及び図7） 30

（3）他の実施例

発明の効果

## 【0002】

【産業上の利用分野】本発明は印刷装置に関し、例えばカード状印刷媒体にカラー画像を印刷するカード印刷装置に適用して好適なものである。

## 【0003】

【従来の技術】従来、カード状の印刷媒体に染料熱転写方式でカラー画像を印刷するカード印刷装置がある。この種のカード印刷装置においては、カラー写真等から光学的に読み取ったカラー画像情報や、ビデオカメラで撮影したカラー画像情報に基づいて、インクリボンに等間隔で塗布されているイエロー、マゼンタ、シアン及びブラック等の染料を、熱転写ヘッドによつてカード状印刷媒体（以下カードと呼ぶ）上に順次重ねて熱転写することにより、カード上にカラー画像を印刷するようになされている（特開昭62-11370号公報）。

## 【0004】

【発明が解決しようとする課題】ところでカード印刷装置においては、インクリボン上にイエロー、マゼンタ、

シアン及びブラックの色染料に続いて配されたフィルム状シートを熱転写ヘッドで印画面上に転写し、これにより専用のラミネート装置を用いずにカードにラミネートを施すようなものがある。またこのようなカード印刷装置で、例えば入出者の識別等に使用する識別カードいわゆるIDカードを印刷するものがあり、このような場合IDカードの機密性すなわちセキュリティ性が問題になってくる。

【0005】例えば銀行カードやクレジットカード等においては、カード表面のラミネート上にホログラムを配して容易に偽造や改ざんができないように工夫されたものがあり、高いセキュリティ性を有するカードが実現されている。従つてカード印刷装置を用いてIDカードを印刷する際にも、容易に偽造や改ざんができないようなIDカードを印刷できれば、カード印刷装置としての有用性を格段的に向上し得ると考えられる。またIDカードに限らず一般的なカード印刷装置では、プリントサンプルの風格を高めるために、例えば銀塩写真でのマツト処理のような加工を施すことができれば、カード自体の意匠的效果を向上し得ると考えられる。

【0006】本発明は以上の点を考慮してなされたもので、簡易な構成で印画面上に形成したラミネートで偽造や改ざんを防止すると共に意匠的效果を向上し得る印刷装置を提案しようとするものである。

## 【0007】

【課題を解決するための手段】かかる課題を解決するため本発明においては、インクリボン62上に配された色インクY、M、C、Kで所定の印刷媒体37の印画面上に所定の印刷を行うと共に、インクリボン62上に色インクY、M、C、Kに続いて配されたフィルム状シートFを熱転写ヘッド48で印画面上に転写する印刷装置20において、フィルム状シートFを熱転写ヘッド48で転写する際に、1印画面分の印刷パターンを記憶するメモリ手段86を設け、熱転写ヘッド48でフィルム状シートFに印刷パターンを形成しながらで印刷媒体37の印画面上を覆うようにした。

## 【0008】

【作用】熱転写ヘッド48でフィルム状シートFに、メモリ手段86に記憶された1印画面分の印刷パターンを形成しながら印刷媒体37の印画面上を覆うようにしたことにより、簡易な構成で印画面上に形成したラミネートで偽造や改ざんを防止すると共に意匠的效果を向上し得る。

## 【0009】

【実施例】以下図面について、本発明の一実施例を詳述する。

## 【0010】（1）カード印刷装置の全体構成

図1及び図2において、20は全体としてカード印刷装置を示し、筐体21内部に印刷部、カード搬送部、画像処理部及び各種の駆動機構等が内蔵されている。カード

印刷装置20の筐体前面にはカードカセット挿入口22が設けられ、このカード挿入口22に印刷媒体としてのカードが複数積載されたカードカセット23が装填される。また筐体21の前面にはリボンカセット挿入口24が設けられ、所定のリボンカセット25が挿入される。さらに筐体21の前面には電源スイッチ26やカード印刷装置20の動作状態を表示するLED表示部27等が設けられている。さらにまたカードカセット挿入口22が設けられた側に対して反対側の筐体21の側面にはカード排出口28が設けられ、このカード排出口28から印刷済のカードが排出される。

【0011】ここでカード印刷装置20のカード搬送部及び印刷部は、図3に示すように構成されている。すなわちカード搬送部30は、矢印aで示すカード搬送方向に延長するように設けられたボールねじ32が搬送台33の下部に設けられたナット部34を貫通され、これによりボールねじ32をパルスモータ35によつて回転させることにより、搬送台33を図中実線で示すカード載置位置から一点鎖線で示すカード排出位置まで移動させる。このとき搬送台33は矢印aで示す搬送方向に延長するように設けられた1対のリニアシャフト（図示せず）により摺動自在に支持されていることにより、水平な状態で矢印aの方向又はこれとは逆方向に移動する。

【0012】カードカセット23の近傍位置にはカード送出部36が設けられ、このカード送出部36によつてカードカセット23内に積重されたカード37を搬送台33の方向に送出する。すなわちカード送出部36は、モータ38と、モータ38によつて回転駆動される歯車39と、歯車39に歯合する歯車40と、歯車40の上面に固定された半月状のキック板41とにより構成され、キック板41を所定のタイミングで回転させることにより、カードカセット23内の最下位置のカード37が搬送台33の方向に蹴り出される。

【0013】搬送台33の方向に蹴り出されたカード37は、モータ42により回転駆動されるカード搬出用ローラ43及び44間に挟まれると共に、伝達機構（図示せず）を介してモータ42により回転駆動されるカード搬出用ローラ45によつて搬送台33上に載置される。ここでカード搬出用ローラ43及び44とカード搬出用ローラ45との間にはクリーニングローラ46が設けられ、これにより印刷に先だつてカード37の印刷面がクリーニングされる。また搬送台33の上面にはカード保持部47が設けられ、これによりカード37の水平方向の移動を規制する。

【0014】また熱転写ヘッド48の両側の搬送経路には、本体シャーシ（図示せず）に固定された浮上り防止部材49及び50が設けられている。浮上り防止部材49及び50は複数のローラ51を有し、このローラ51が搬送台33上に載置されたカード37に当接することにより、搬送中及び印刷中の搬送台33からのカード3

7の浮上りを防止する。

【0015】ここで印刷が終了したカード37は、カード排出用ローラ52、53及び54によつて搬送台33上を矢印aの方向に摺動され、カード排出口28を介して外部に排出される。すなわちカード排出用ローラ52は、モータ55の駆動力を歯車56を介して受けて時計方向に回転すると共に、排出用ローラ53及び54はモータ55の駆動力を互いに歯合した歯車56、57及び58を介して受けて時計方向に回転し、この結果搬送台33上のカード37を矢印aの方向に摺動させる。またこのとき搬送台33の近傍位置に設けられたレバー解除軸59によつてカード保持部47によるカード37の前方方向への規制が解除される。

【0016】なおこのカード印刷装置20においては、カード37の移動状態や搬送台33の位置が光学センサによつて検出され、カード37や搬送台33が正しい位置に位置決め制御される。すなわちセンサS2はカードカセット23が装填されたか否かを検出し、センサS3はカードカセット23内にカード37があるか否かを検出し、センサS4はキック板41の回転位置を検出し、センサS5はカードカセット23からカード37が搬出されたか否かを検出し、センサS6は搬送台33上にカード37が載置されたか否かを検出し、センサS7はカード37が排出されたか否かを検出する。

【0017】また搬送台33の側面に形成された検出用突起60に基づいて、各センサS8、S9及びS10は搬送台33の位置を検出する。すなわちセンサS8は搬送台33がカード供給位置に到達したか否かを検出し、センサS9は搬送台33が印刷開始位置に到達したか否かを検出し、センサS10は搬送台33がカード排出位置に到達したか否かを検出する。

【0018】印刷部31は供給リール61に巻回されたインクリボン62を、リボンガイド63及び64によつて支持した状態で、直流（DC）モータ65により回転駆動される巻取リール66によつて巻き取る。供給リール61にはトルクリミッタ（図示せず）が配置され、一定のトルクでインクリボン62にバックテンションを与える。また巻取リール66には光学センサ構成でなる巻径検出用エンコーダ（図示せず）が配置されている。

【0019】インクリボン62には1頁分の染料としてイエロー、マゼンタ及びシアンの色染料がそれぞれ所定の長さで塗布されている。またインクリボン62は各頁分の色染料の先頭位置に頁先頭マークが塗布されていると共に、各色染料の先頭位置に各色を識別する色識別マークが塗布されている。これにより印刷装置20では、インクリボン62の走行経路に設けられた光学センサ（図示せず）がそれぞれ頁先頭マーク及び色識別マークを検出し、この検出結果に基づいてインクリボン62のテンション制御を行う。

【0020】熱転写ヘッド48が設けられたヘッドユニ

5

ット70は回転軸71によって回転自在に保持された加圧レバー72の一端に着脱自在に取り付けられている。加圧レバー72の他端はリンク73を介してカム板74に揺動自在に取り付けられている。これによりヘッドユニット70は、カム板74が所定のモータ（図示せず）によって回転駆動されることにより昇降され、図3に示す中間位置、この中間位置から上昇してインクリボン62から離間する初期位置、中間位置から下降してカード37に当接する最下位置に位置決めされている。

【0021】すなわちヘッドユニット70はインクリボン62を装填する際には初期位置に移動し、搬送台33上にカード37が載置された際には中間位置に移動し、搬送台33が印刷開始位置に到達した際には最下位置に移動する。カード印刷装置20においては、このヘッドユニット70の昇降状態をカム板74の切欠部の近傍に設けられた光学センサS11及びS12によって検出する。熱転写ヘッド48は端面型の構成でなり、紙面に垂直なカード37の幅方向全体に亘ってカード37に当接する。これによりカード37が矢印aの方向に移動するとカード37の印刷面全面に亘って所望の画像を印刷し得るようになされている。

【0022】ここでこのカード印刷装置20による実際の印刷は、図4及び図5に示す印刷動作手順SP0に従って実行される。すなわちまず印刷動作手順SP0から入って次のステップSP1において、カード37をカードカセット23より取り出し、次のステップSP2においてカード37が取り出されたか否かを判断し、否定結果を得た場合にはステップSP3に移って、カード切れ等を表示するエラー処理を行う。

【0023】一方カード37が取り出された場合には、ステップSP4に移ってカード37を搬出し、ステップSP5においてカード37が搬出されたか否かを判断し、否定結果を得るとステップSP4を繰り返し、肯定結果の場合には次のステップSP6に移ってカード37を搬送台33上に載置する。続いてステップSP7において、搬送台33を熱転写ヘッド48の位置に位置決めし、搬送台33を停止する。なおこのとき熱転写ヘッド48は上昇した位置（初期位置）にある。

【0024】次にステップSP8において、カム板74の駆動モータが駆動され熱転写ヘッド48を中間位置まで下ろし、次のステップSP9において、インクリボン62の1頁分の頭出しを行う。続いて次のステップSP10において、インクリボン62の巻径を検出し、ステップSP11において検出された巻径に応じてDCモータ65の駆動条件を設定する。

【0025】続いてステップSP12において、再びカム板74の駆動モータが働いて熱転写ヘッド48を最下位置まで下ろし、ステップSP13においてDCモータ65を駆動してインクリボン62の巻取りを開始し、ステップSP14において所定ライン数（ $\alpha$ ）だけ搬送台

6

33を移動させる。次にステップSP15において1色分の印刷を開始し、ステップSP16において1色分の印刷として965ライン分だけ印刷し、次のステップSP17において、1色分の印刷を終了しインクリボン62を剥離し、搬送台33を所定ライン数（ $\beta$ ）だけ移動させる。

【0026】続いてステップSP18において熱転写ヘッド48を中間位置まで上げ、次のステップSP19において、3色分の印刷が終了したか否かを判断し、否定結果を得ると、次のステップSP20において搬送台33を965ラインに $\alpha$ 及び $\beta$ ラインを加えたライン数分だけ戻す。また次のステップSP21において次の色のインクリボン62の頭出しを行った後、上述のステップSP12に戻って1色分の印刷処理を行う。やがてステップSP19で肯定結果を得ると、ステップSP22において、カード37を排出し、このようにしてカード37上にカラー印刷し得るようになされている。

【0027】（2）実施例のカード印刷装置

ここでこの実施例のカード印刷装置20においては、カード37として入出者の識別等に使用するIDカード37を印刷し得るようになされ、印刷面として入出者の氏名や顔写真等が印刷される。またこのIDカード37の印刷面上は所定の文字の繰り返しパターン等が透かし模様状に配されたフィルム状シートでラミネートされている。

【0028】この実施例の場合インクリボン62は、図5に示すように、1頁分の染料としてそれぞれ所定の長さで塗布されたイエローY、マゼンタM及びシアンCの各色染料に続いて、フィルム状シートFが配されている。これによりこのカード印刷装置20ではフィルム状シートFを熱転写ヘッド48でIDカード37の印刷面上に転写してラミネートする。

【0029】またこのとき熱転写ヘッド48でフィルム状シートFに所定の文字の繰り返しパターン等を印刷することにより、印刷された繰り返しパターンでフィルム状シートFに透かし模様が形成され、このフィルム状シートFをラミネートすることにより、容易に印刷面の情報を偽造や改ざんができず高いセキュリティ性を有するIDカード37を印刷し得る。

【0030】實際上このカード印刷装置20は、図6に示すような回路ブロックで構成される。すなわちホストコンピュータ（図示せず）より入力される印刷データS1は、各色毎に1印刷面分の容量を有するフレームメモリ80（80Y、80M、80C、80K）に色別に一旦書き込まれる。この書き込みは、バスでCPU81に接続されたメモリコントローラ82を通じて、CPU81より制御される。

【0031】このフレームメモリ80に書き込まれた印刷データS1は、メモリコントローラ82によって所定のタイミングで読み出され、このうちイエロー、マゼン

7

タ及びシアンにそれぞれ対応する色印刷データSY、SM、SCが各色毎の色調整回路83（83Y、83M、83C）で印刷に応じた色調整され、マスキング回路84を通じてセクタ85に入力される。またフレームメモリ80に書き込まれた黒色用の色印刷データSKは、色調整やマスキングの必要がないことにより、所定のタイミングで読み出され、そのままセクタ85に送出される。

【0032】さらにこの実施例のカード印刷装置20では、フレームメモリ80と同様に1印画面分の記憶容量を有するラミネートメモリ86を有し、フィルム状シートFに形成する所定の文字の繰り返しパターン等を表すラミネート印刷データSFが一旦書き込まれる。このラミネートメモリ86もフレームメモリ80と同様にメモリコントローラ82によつて制御される。またラミネートメモリ86に書き込まれたラミネート印刷データSFは、黒色の色印刷データSKと同様に色調整やマスキングの必要がないことにより、所定のタイミングで読み出され、そのままセクタ85に送出される。

【0033】セクタ85はCPU81の制御によつて、図4及び図5に上述したような印刷動作手順に準じて、イエロー、マゼンタ及びシアンにそれぞれ対応する色印刷データSY、SM、SC、黒色用の色印刷データSK、ラミネート印刷データSFを順次選択して印刷出力データS2として $\gamma$ 補正回路87に送出する。 $\gamma$ 補正回路87はCPU81の制御に基づいて設定された熱補正係数によつて、濃度通電時間変換すなわち $\gamma$ 補正を行い、この結果得られる印刷出力データS3がサーマルヘッドコントローラ88で印画エネルギーS4に変換され、熱転写ヘッド48で印刷される。

【0034】以上の構成において、このカード印刷装置20の場合、ホストコンピュータ側から所定の印画面を表す印刷データS1として、イエロー、マゼンタ、シアン及び黒の色印刷データSY、SM、SC、SK、ラミネート印刷データSFが順次入力される。このうち色印刷データはそれぞれの色に対応するフレームメモリ80（80Y、80M、80C、80K）に書き込まれ、ラミネート印刷データSFはラミネートメモリ86に書き込まれる。

【0035】フレームメモリ80、ラミネートメモリ86に書き込まれた印刷データSY、SM、SC、SK、SFは必要に応じて色調整されると共にマスキングされ、セクタ85に送出される。セクタ85では色印刷順序に応じて、色印刷データSY、SM、SC、SK及びラミネート印刷データSFの順に $\gamma$ 補正すると共に、印画エネルギーに変換し熱転写ヘッド48に供給する。

【0036】これによりこのカード印刷装置20では、例えば入出者の識別情報として氏名や顔写真等をカラー印刷すると共に、所定の文字の繰り返しパターン等が透

8

かし模様状に配されたフィルム状シートFでラミネートしたIDカード37を印刷し得るようになされている。このようにIDカード37を透かし模様が配されたフィルム状シートFでラミネートすることにより、新たにラミネートメモリ86を設けた簡易な構成で、容易に偽造や改ざんができず高いセキュリティ性を有するIDカード37を印刷できる。

【0037】以上の構成によれば、フィルム状シートFを熱転写ヘッド48で転写する際に、ラミネートメモリ86に書き込まれたラミネート印刷データで熱転写ヘッド48を駆動しながら転写するようにしたことにより、ラミネート印刷データSFに応じた印刷パターンが形成されたフィルム状シートFでIDカード37をラミネートすることができ、偽造や改ざんが困難で高いセキュリティ性を有するIDカード37を容易に印刷し得るカード印刷装置20を実現できる。

【0038】（3）他の実施例

なお上述の実施例においては、ラミネート印刷データとして所定の文字の繰り返しパターン等で透かし模様を形成したフィルム状シートでカードをラミネートして高いセキュリティ性を得るようにしたが、ラミネート印刷データはこれに限らず、例えば市松模様や所定の凹凸模様等でも良く、このようにすれば、印画面上に銀塩写真でのマツト処理のような加工を施すことができ、カード自体の意匠的効果を向上し得る。

【0039】また上述の実施例においては、色印刷データ用のフレームメモリに加えて、ラミネート印刷データ用のラミネートメモリを設けた場合について述べたが、色印刷用のフレームメモリが時分割で用いられるような場合には、ラミネート印刷データも色印刷用のデータに続いて時分割で用いるようにしても上述の実施例と同様の効果を実現できる。

【0040】さらに上述の実施例においては、本発明による印刷装置として、IDカード等の印画面上に所定の情報を印刷するカード印刷装置に適用したが、本発明はこれに限らず、紙や他の印刷媒体に印刷する印刷装置に広く適用して好適なものである。

【0041】

【発明の効果】上述のように本発明によれば、熱転写ヘッドでフィルム状シートにメモリ手段に記憶された1印画面分の印刷パターンを形成しながら印刷媒体の印画面上を覆うようにしたことにより、簡易な構成で印画面上に形成したラミネートで偽造や改ざんを防止すると共に意匠的効果を向上し得る印刷装置を実現できる。

【図面の簡単な説明】

【図1】本発明による印刷装置の一実施例の外観構成を示す斜視図である。

【図2】本発明による印刷装置の一実施例の外観構成を示す斜視図である。

【図3】本発明による印刷装置の一実施例における搬送

9

部及び印刷部を示す略線的側面図である。

【図4】実施例のカード印刷装置における印刷動作の説明に供するフローチャートである。

【図5】実施例のカード印刷装置における印刷動作の説明に供するフローチャートである。

【図6】実施例のカード印刷装置に用いられるインクリボンの説明に供する略線図である。

【図7】実施例のカード印刷装置の回路構成を示すブロック図である。

【符号の説明】

20……カード印刷装置、21……筐体、28……カード排出口、30……搬送部、31……印刷部、32……

10

ボールねじ、33……搬送台、34……ナット部、36……カード送出部、37……カード、41……キツク板、43～45……カード搬出用ローラ、46……クリーニングローラ、47……カード保持部、48……熱転写ヘッド、49、50……浮上り防止部材、51A～51D……ローラ、52～54……カード排出用ローラ、59……レバー解除軸、60……検出用突起、61……供給リール、62……インクリボン、66……巻取りリール

10 70……ヘッドユニット、72……加圧レバー、73……レバー、74……カム板、S2～S12……センサ。

【図1】

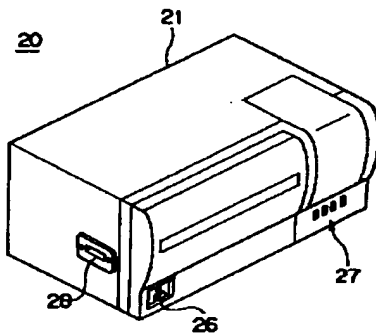


図1 外観構成(1)

【図2】

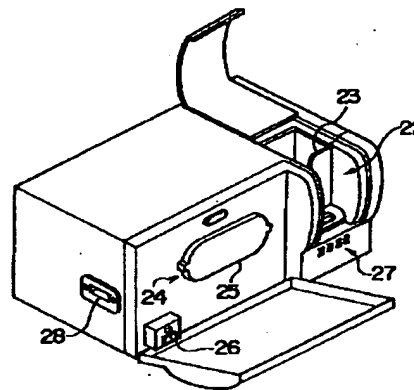


図2 外観構成(2)

【図3】

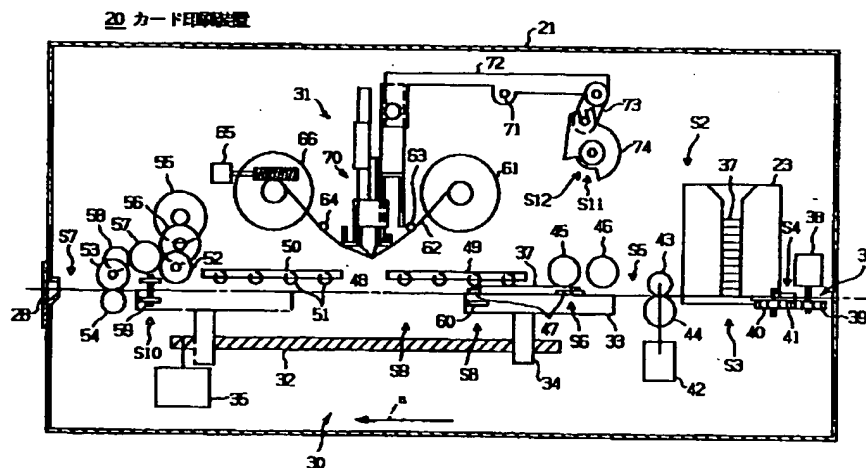


図3 搬送部及び印刷部の構成

【図4】

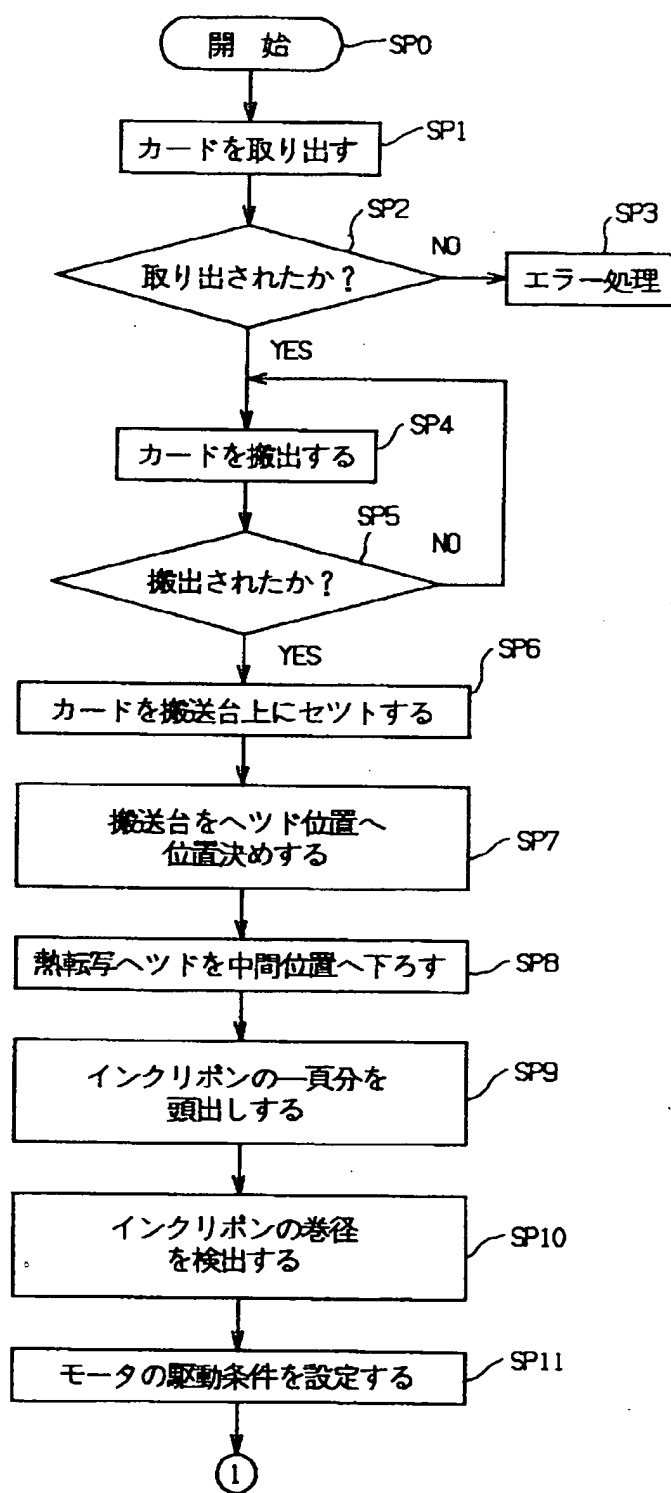


図4 印刷動作手順(1)



【図5】

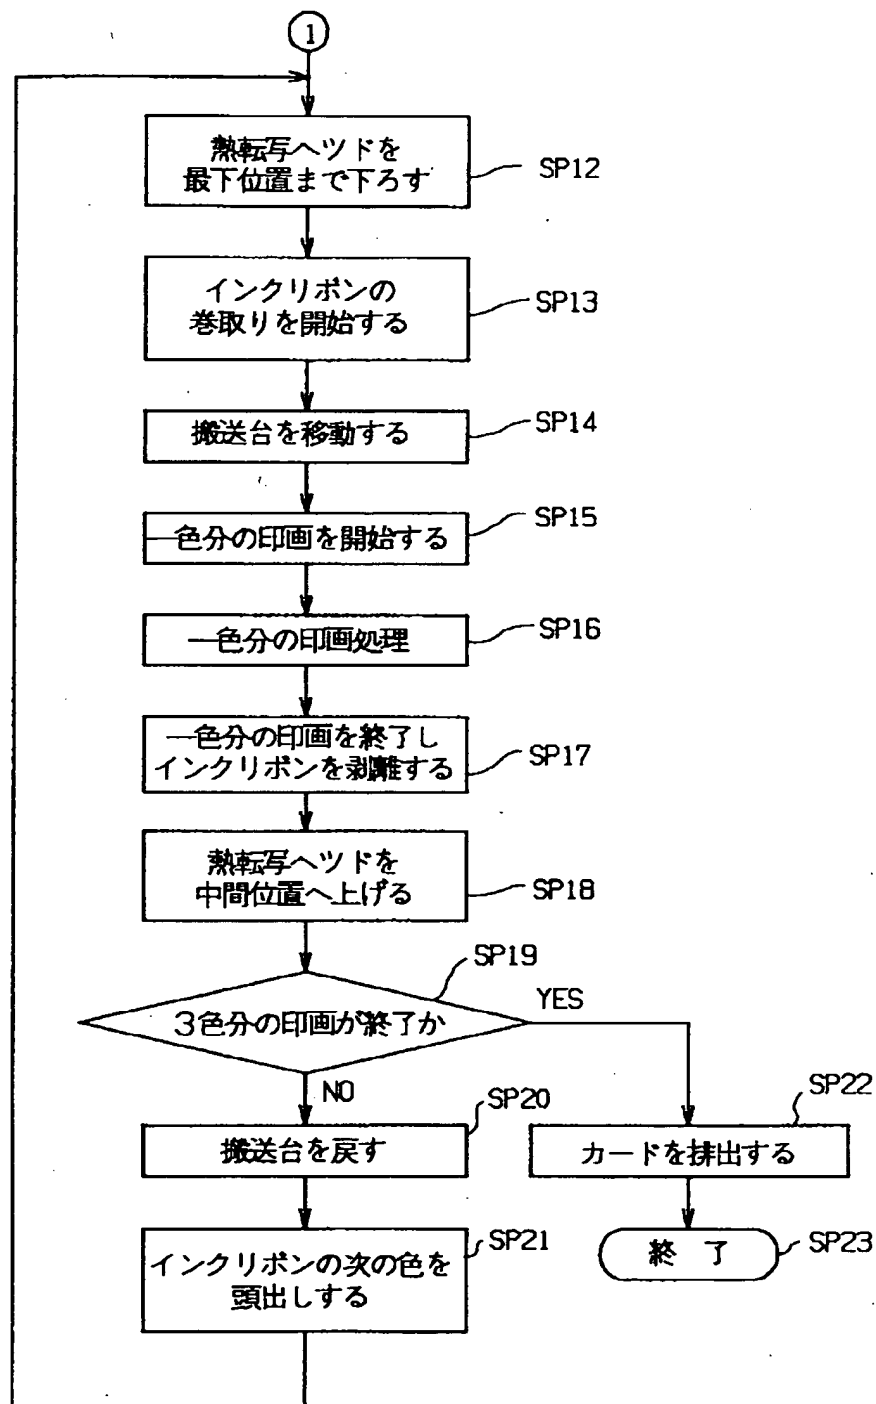


図5 印刷動作手順(2)

【図6】

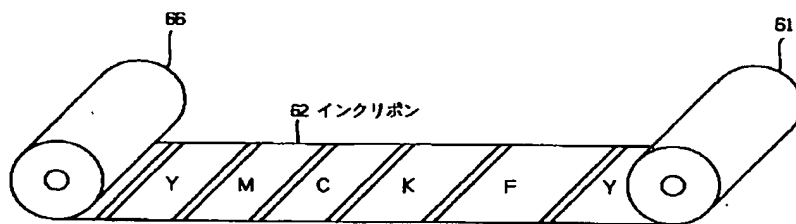


図6 実施例のインクリボン

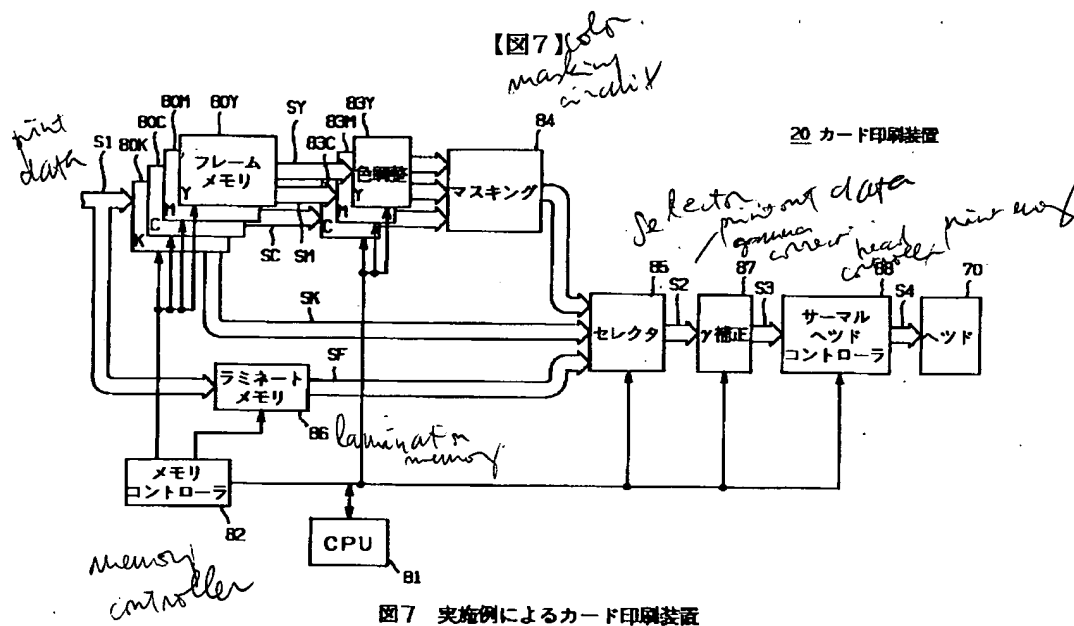


図7 実施例によるカード印刷装置

## フロントページの続き

(51) Int. Cl. <sup>6</sup>

識別番号

片内整理番号

FI

### 技術表示箇所

**B 4 1 J 35/16**

B

**B 4 1 M 5/26**

9121-2H

B4 1 M 5/26

A

(72)発明者 高野 洋明

東京都品川区北品川6丁目7番35号ソニー  
株式会社内

(72)発明者 山崎 正彦

東京都板橋区志村2丁目16番20号株式会社  
コバル内

(72)発明者 山崎 悟

東京都板橋区志村2丁目16番20号株式会社  
コバル内

(72)発明者 近内 俊彦

東京都板橋区志村2丁目16番20号株式会社  
コバル内

\* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

CLAIMS

---

[Claim(s)]

[Claim 1] While performing predetermined printing on the print side of print media predetermined in the color ink arranged on the ink ribbon in the airline printer which imprints the film-like sheet arranged following the above-mentioned color ink on the above-mentioned ink ribbon on the above-mentioned print side with a hot printing head in case the above-mentioned film-like sheet is imprinted with the above-mentioned hot printing head, it has a memory means to memorize the printing pattern of 1 print region. The airline printer characterized by covering the above-mentioned print side top of the above-mentioned print media, forming the above-mentioned printing pattern in the above-mentioned film-like sheet with the above-mentioned hot printing head.

[Claim 2] The above-mentioned memory means is an airline printer according to claim 1 characterized by making it prepare apart from a color memory means to memorize the printing pattern for one screen according to the above-mentioned color ink, respectively.

[Claim 3] The above-mentioned memory means is an airline printer according to claim 1 characterized by using the printing pattern for one screen according to the above-mentioned color ink also [ means / to memorize by time sharing / color memory ].

---

[Translation done.]

\* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

DETAILED DESCRIPTION

---

[Detailed Description of the Invention]

[0001]

[Table of Contents] This invention is explained in order of the following.

Technical-problem The means for solving a technical problem which technical invention of the Field of the Invention former tends to solve ( drawing 6 and drawing 7 )

Operation ( drawing 6 and drawing 7 )

The whole example (1) card airline printer configuration ( drawing 1 - drawing 5 )

(2) The card airline printer of an example ( drawing 3 , drawing 6 , and drawing 7 )

(3) Other example effects of the invention [0002]

[Industrial Application] This invention is applied to the card airline printer which prints a color picture to card-like print media, concerning an airline printer, and is suitable.

[0003]

[Description of the Prior Art] Conventionally, the card airline printer which prints a color picture by the color hot printing method is in card-like print media. It is made as [ print / on a card / by therefore carrying out hot printing of the colors, such as yellow applied to the ink ribbon at equal intervals based on the color picture information which read optically from color photography etc. in card / this kind of / airline printer, and was photoed with \*\*\*\*\* color picture information and a video camera, a Magenta, cyanogen, and black, to a hot printing head in piles one by one on card-like print media (it being called a following card) / a color picture ] (JP,62-11370,A).

[0004]

[Problem(s) to be Solved by the Invention] By the way, in a card airline printer, the film-like sheet arranged following yellow, a Magenta, cyanogen, and the charge of color dyeing of black on the ink ribbon is imprinted on a print side with a hot printing head, and there are some which laminate on a card, without this using the lamination equipment of dedication. moreover, the thing which prints the selector-card \*\*\*\*\* ID card which is such a card airline printer, for example, is used for discernment of an ON appearance person etc. -- it is -- such a case -- the confidentiality, i.e., security nature, of an ID card -- a problem -- intermediary \*\*\*\*.

[0005] For example, in the banking card, the credit card, etc., there are some which were devised so that a hologram might be allotted and neither forgery nor an alteration could be easily performed on the lamination of a card face, and the card which has high security nature is realized. Therefore, if the ID card which can perform neither forgery nor an alteration easily can be printed also in case an ID card is printed using a card airline printer, it will be thought that the usefulness as a card airline printer may be markedly improved on a target. Moreover, not only with an ID card but with a common card airline printer, if processing like the mat processing by the film photo can be performed in order to raise the dignity of a print sample for example, it will be thought that the design-effectiveness of the card itself may be improved.

[0006] this invention was made in consideration of the above point, and it tends to propose the airline printer which may improve design-effectiveness while it prevents forgery and an alteration by the lamination formed on the print side with the simple configuration -- it comes out -- it is.

[0007]

[Means for Solving the Problem] In order to solve this technical problem, it sets to this invention. While performing predetermined printing on the print side of the print media 37 predetermined in the color ink Y, M, C, and K arranged on the ink ribbon 62 In the airline printer 20 which imprints the film-like sheet F arranged following color ink Y, M, C, and K on the ink ribbon 62 on a print side with the hot printing head 48 When imprinting the film-like sheet F with the hot printing head 48, a memory means 86 to memorize the printing pattern of 1 print region was established, and the print side top of print media 37 was covered, forming a printing pattern in the film-like sheet F with the hot printing head 48.

[0008]

[Function] Design-effectiveness may be improved while preventing forgery and an alteration by the lamination formed on the

print side with the simple configuration by having covered the print side top of print media 37, forming the printing pattern of 1 print region memorized by the film-like sheet F at the memory means 86 with the hot printing head 48.

[0009]

[Example] About a drawing, one example of this invention is explained in full detail below.

[0010] (1) In whole card airline printer block diagram 1 and drawing 2, 20 shows a card airline printer as a whole, and the printing section, the card conveyance section, the image-processing section, various kinds of drives, etc. are built in the case 21 interior. The card cassette insertion opening 22 is formed in the front face of a case of the card airline printer 20, and this card slot 22 is loaded with the card cassette 23 by which two or more loading of the card as print media was carried out. Moreover, the ribbon cassette insertion opening 24 is formed in the front face of a case 21, and the predetermined ribbon cassette 25 is inserted. Furthermore, the LED display 27 grade which displays the operating state of an electric power switch 26 or the card airline printer 20 is prepared in the front face of a case 21. The card exhaust port 28 is formed in the side face of the case 21 of the opposite side to the side in which the card cassette insertion opening 22 was formed further again, and a card [ finishing / printing ] is discharged from this card exhaust port 28.

[0011] The card conveyance section and the printing section of the card airline printer 20 are constituted here, as shown in drawing 3. That is, the card conveyance section 30 is moved to the card discharge location which shows the conveyance base 33 with an alternate long and short dash line from the card installation location shown by the drawing solid line, when the ball thread 32 prepared so that it might extend in the card conveyance direction shown by the arrow head a penetrates the nut section 34 prepared in the lower part of the conveyance base 33 and therefore makes a pulse motor 35 rotate a ball thread 32 by this. At this time, the conveyance base 33 moves to hard flow with the direction of an arrow head a, or this in the level condition, when supported free [ sliding ] by one pair of linear shafts (not shown) prepared so that it might extend in the conveyance direction shown by the arrow head a.

[0012] The card sending-out section 36 is formed in the near location of the card cassette 23, and the card 37 therefore accumulated into the card cassette 23 at this card sending-out section 36 is sent out in the direction of the conveyance base 33. Namely, the card sending-out section 36 is constituted by the kick plate 41 of the shape of a half moon fixed to the motor 38 and the motor 38 by the top face of the gearing 39 with which a rotation drive is therefore carried out, the gearing 40 which engages on a gearing 39, and a gearing 40, and the card 37 of the lowest location in the card cassette 23 begins to be kicked in the direction of the conveyance base 33 by rotating the kick plate 41 to predetermined timing.

[0013] Therefore, the card 37 which began to be kicked in the direction of the conveyance base 33 is laid on the conveyance base 33 by the roller 45 for card taking out by which a rotation drive is carried out by the motor 42 through a transfer device (not shown) while it is inserted between the roller 43 for card taking out by which a rotation drive is carried out by the motor 42, and 44. a cleaning roller 46 is formed here between the rollers 43 and 44 for card taking out, and the roller 45 for card taking out, and, thereby, it is the point at printing – the printing side of the intermediary card 37 is cleaned. Moreover, the card attaching part 47 is formed in the top face of the conveyance base 33, and this regulates horizontal migration of a card 37.

[0014] Moreover, the relief prevention members 49 and 50 fixed to the body chassis (not shown) are formed in the conveyance path of the both sides of the hot printing head 48. The relief prevention members 49 and 50 have two or more rollers 51, and prevent the relief of the card 37 from the conveyance base 33 under conveyance and printing by contacting the card 37 with which this roller 51 was laid on the conveyance base 33.

[0015] Therefore, the card 37 which printing ended here slides on the conveyance base 33 top in the direction of an arrow head a at the rollers 52, 53, and 54 for card discharge, and is discharged outside through the card exhaust port 28. Namely, the rollers 53 and 54 for discharge receive the driving force of a motor 55 through the gearings 56, 57, and 58 which engaged mutually, and rotate clockwise, and, as a result, the roller 52 for card discharge slides the card 37 on the conveyance base 33 in the direction of an arrow head a while it receives the driving force of a motor 55 through a gearing 56 and rotates clockwise. Moreover, therefore, the regulation to the direction of the front of the card 37 by the card attaching part 47 is canceled by the lever discharge shaft 59 prepared in the near location of the conveyance base 33 at this time.

[0016] In addition, in this card airline printer 20, therefore the location of the migration condition of a card 37 or the conveyance base 33 is detected by the photo sensor, and point-to-point control of a card 37 or the conveyance base 33 is carried out to a right location. Namely, a sensor S2 detects whether it was loaded with the card cassette 23. It detects whether a sensor S3 has a card 37 in the card cassette 23. Sensor S4 detects the rotation location of the kick plate 41, a sensor S5 detects whether the card 37 was taken out from the card cassette 23, it detects whether as for the sensor S6, the card 37 was laid on the conveyance base 33, and a sensor S7 detects whether the card 37 was discharged.

[0017] Moreover, based on the projection 60 for detection formed in the side face of the conveyance base 33, each sensor S8, S9, and S10 detect the location of the conveyance base 33. That is, a sensor S8 detects whether the conveyance base 33 arrived at the card supply location, sensor S9 detects whether the conveyance base 33 arrived at the printing starting position, and a sensor S10 detects whether the conveyance base 33 arrived at the card discharge location.

[0018] The printing section 31 is in the condition therefore supported to ribbon guides 63 and 64, and, therefore, rolls round the ink ribbon 62 wound around the supply reel 61 to the take-up reel 66 by which a rotation drive is carried out by the direct-

current (DC) motor 65. A torque limiter (not shown) is arranged at the supply reel 61, and a back tension is given to an ink ribbon 62 with fixed torque. Moreover, the encoder for wound diameter detection (not shown) which becomes a take-up reel 66 with a photo-sensor configuration is arranged.

[0019] Yellow, the Magenta, and the charge of color dyeing of cyanogen are applied to the ink ribbon 62 by predetermined die length as a color for 1 page, respectively. Moreover, the color identification marking from which an ink ribbon 62 discriminates each color in the head location of each charge of color dyeing while the page head mark is applied to the head location of the charge of color dyeing for each page is applied. Thereby, with an airline printer 20, the photo sensor (not shown) prepared in the transit path of an ink ribbon 62 detects a page head mark and color identification marking, respectively, and performs tension control of an ink ribbon 62 based on this detection result.

[0020] The head unit 70 in which the hot printing head 48 was formed is attached in the end of the pressurization lever 72 therefore held free [ rotation ] at the rotation shaft 71 free [ attachment and detachment ]. The other end of the pressurization lever 72 is attached in the cam plate 74 free [ rocking ] through the link 73. Thereby, the head unit 70 is positioned in the lowest location which the cam plate 74 goes up and down by therefore carrying out a rotation drive on a predetermined motor (not shown), descends from the mid-position shown in drawing 3, the initial valve position which goes up from this mid-position and is estranged from an ink ribbon 62, and the mid-position, and contacts a card 37.

[0021] That is, in case the head unit 70 loads with an ink ribbon 62, it moves to an initial valve position, when a card 37 is laid on the conveyance base 33, it moves to the mid-position, and when the conveyance base 33 arrives at a printing starting position, it moves to the lowest location. Therefore in the card airline printer 20, it detects to the photo sensors S11 and S12 in which the rise-and-fall condition of this head unit 70 was prepared near the notch of the cam plate 74. The hot printing head 48 becomes with an edge two-dimensional configuration, and contacts the \*\*\*\*\* card 37 crosswise [ of the card 37 perpendicular to space / whole ]. If a card 37 moves in the direction of an arrow head a by this, it is made as [ carry out / to the whole printing side surface of a card 37 / the print of the image of a \*\*\*\*\* request ].

[0022] the printing operations sequence SP 0 which shows actual printing by this card airline printer 20 to drawing 4 and drawing 5 here – therefore, it performs. namely, – first – the close intermediary from the printing operations sequence SP 0 – in the following step SP 1, it judges whether the card 37 was picked out from the card cassette 23, and the card 37 was taken out in the following step SP 2, and when a negative result is obtained, error processing which displays \*\*\*\*\* , a card piece, etc. on a step SP 3 is performed.

[0023] On the other hand, when a card 37 is taken out, if it judges whether the \*\*\*\*\* card 37 was taken out to a step SP 4, and the card 37 was taken out in a step SP 5 and a negative result is obtained, a step SP 4 will be repeated and, in the case of an affirmation result, the \*\*\*\*\* card 37 will be laid on the conveyance base 33 at the following step SP 6. Then, in a step SP 7, the conveyance base 33 is positioned in the location of the hot printing head 48, and the conveyance base 33 is suspended. In addition, the hot printing head 48 is in the location (initial valve position) which rose at this time.

[0024] Next, in a step SP 8, the drive motor of the cam plate 74 drives, the hot printing head 48 is taken down to the mid-position, and the head of 1 page of an ink ribbon 62 is pulled out in the following step SP 9. Then, in the following step SP 10, the drive conditions of DC motor 65 are set up according to the wound diameter which detected the wound diameter of an ink ribbon 62 and was detected in a step SP 11.

[0025] Then, in a step SP 12, the drive motor of the cam plate 74 works again, the hot printing head 48 is taken down to the lowest location, DC motor 65 is driven in a step SP 13, rolling up of an ink ribbon 62 is started, and only the number (alpha) of predetermined Rhine moves the conveyance base 33 in a step SP 14. Next, the print of 1 classification by color is started in a step SP 15, and it sets to a step SP 16, and is a print of 1 classification by color. A print is carried out by 965 lines, in the following step SP 17, the print of 1 classification by color is ended, an ink ribbon 62 is exfoliated, and only the number (beta) of predetermined Rhine moves the conveyance base 33.

[0026] Then, when the hot printing head 48 is raised to the mid-position in a step SP 18, it judges whether the print of 3 classification by color was completed in the following step SP 19 and a negative result is obtained, it sets to the following step SP 20, and is about the conveyance base 33. It returns only several Rhine minutes which added alpha and beta Rhine to 965 lines. Moreover, in the following step SP 21, the head of the ink ribbon 62 of the following color is pulled out for print processing of \*\*\*\*\* 1 classification by color to the above-mentioned step SP 12 after \*\*\*\*\* . If an affirmation result is soon obtained at a step SP 19, in a step SP 22, a card 37 is discharged and it is made as [ carry out / on a card 37 / it does in this way and / a color print ].

[0027] (2) the card airline printer of an example – do to be able to print ID card 37 used for discernment of an ON appearance person etc. as a card 37 in the card airline printer 20 of this example here – an ON appearance person's name, a photograph of his face, etc. are printed as a print side. Moreover, the print side top of this ID card 37 is laminated with the film-like sheet which the repeat pattern of a predetermined alphabetic character etc. spaced and was arranged in the shape of a pattern.

[0028] In the case of this example, as an ink ribbon 62 is shown in drawing 5 R> 5, the film-like sheet F is arranged following the yellow Y applied by predetermined die length as a color for 1 page, respectively, Magenta M, and each charge of color dyeing of Cyanogen C. This imprints and laminates the film-like sheet F on the print side of ID card 37 with the hot printing

head 48 in this card airline printer 20.

[0029] Moreover, ID card 37 which it spaces through the film-like sheet F by the pattern repeatedly, and a pattern is formed, neither forgery nor an alteration can do information on a print side easily at this time when [ which laminate this film-like sheet F ] it was printed by the film-like sheet F by printing the repeat pattern of a predetermined alphabetic character etc. with the hot printing head 48, but has high security nature can be printed.

[0030] In practice, this card airline printer 20 consists of circuit blocks as shown in drawing 6, and is required. That is, the print data S1 inputted from a host computer (not shown) are once written in the frame memory 80 (80Y, 80M, 80C, 80K) which has the capacity of 1 print region for every color according to a color. This writing is controlled by the bus from CPU81 through the memory controller 82 connected to CPU81.

[0031] therefore, the print data S1 written in this frame memory 80 were read to the memory controller 82 to predetermined timing, among these the color print data SY, SM, and SC corresponding to yellow, a Magenta, and cyanogen responded to printing in the color tone ready circuit 83 (83Y, 83M, 83C) for every color, respectively – color adjustment is carried out and it is inputted into a selector 85 through the masking circuit 84. Moreover, when there is no need for color adjustment or masking, color print-data SK for black written in the frame memory 80 is read to predetermined timing, and is sent out to a selector 85 as it is.

[0032] Furthermore, with the card airline printer 20 of this example, it has a frame memory 80 and the lamination memory 86 which has the storage capacity of 1 print region similarly, and lamination print-data SF showing the repeat pattern of the predetermined alphabetic character formed in the film-like sheet F etc. is once written in. Therefore, it is controlled by the memory controller 82 like [ this lamination memory 86 ] a frame memory 80. Moreover, when there is no need for color adjustment or masking like black color print-data SK, lamination print-data SF written in the lamination memory 86 is read to predetermined timing, and is sent out to a selector 85 as it is.

[0033] Therefore, according to printing operations sequence which was mentioned above to drawing 4 and drawing 5, a selector 85 makes sequential selection of the color print data SY, SM, and SC corresponding to yellow, a Magenta, and cyanogen, color print-data SK for black, and lamination print-data SF, considers as the printout data S2, and is sent out to control of CPU81 in a gamma correction circuit 87, respectively. Therefore, concentration resistance-welding-time conversion, i.e., gamma amendment, is performed, the printout data S3 obtained as a result are changed into print energy S4 by the thermal head controller 88, and a gamma correction circuit 87 is printed with the hot printing head 48 by the heat correction factor set up based on control of CPU81.

[0034] In the case of this card airline printer 20, in the above configuration, the sequential input of yellow, a Magenta, cyanogen and the black color print data SY, SM, SC, and SK, and lamination print-data SF is carried out as print data S1 which express a predetermined print side from a host computer side. Among these, color print data are written in the frame memory 80 (80Y, 80M, 80C, 80K) corresponding to each color, and lamination print-data SF is written in the lamination memory 86.

[0035] The print data SY, SM, SC, SK, and SF written in a frame memory 80 and the lamination memory 86 are masked while color adjustment is carried out if needed, and they are sent out to a selector 85. In a selector 85, while doing gamma amendment of at the order of the color print data SY, SM, SC, and SK and lamination print-data SF according to color printing sequence, it changes into print energy and the hot printing head 48 is supplied.

[0036] Thereby, with this card airline printer 20, while color-printing a name, a photograph of his face, etc., for example as an ON appearance person's identification information, it is made as [ print / ID card 37 laminated with the film-like sheet F which the repeat pattern of a predetermined alphabetic character etc. spaced and was arranged in the shape of a pattern ]. Thus, by laminating with the film-like sheet F with which ID card 37 was spaced and the pattern was allotted, ID card 37 which neither forgery nor an alteration can be performed easily, but has high security nature with the simple configuration which newly formed the lamination memory 86 can be printed.

[0037] By having made it imprint, driving the hot printing head 48 with the lamination print data written in the lamination memory 86, when imprinting the film-like sheet F with the hot printing head 48 according to the above configuration ID card 37 can be laminated with the film-like sheet F with which the printing pattern according to lamination print-data SF was formed, and the card airline printer 20 which can print easily ID card 37 with which forgery and an alteration have difficult and high security nature can be realized.

[0038] (3) Although a card is laminated with the film-like sheet which spaced by the repeat pattern of a predetermined alphabetic character etc. as lamination print data, and formed the pattern in other examples, in addition above-mentioned examples and high security nature was obtained Not only this but a checker, a concavo-convex predetermined pattern, etc. are sufficient as lamination print data, and if it does in this way, they can perform processing like the mat processing by the film photo on a print side, and may improve the design-effectiveness of the card itself.

[0039] moreover, an above-mentioned example – setting – the frame memory for color print data – in addition, although the case where the lamination memory for lamination print data was prepared was described, when the frame memory for color printing is used by time sharing, even if it also uses lamination print data by time sharing following the data for color printing,

the same effectiveness as an above-mentioned example can be realized.

[0040] in a further above-mentioned example, although applied to the card airline printer which prints predetermined information on print sides, such as an ID card, as an airline printer by this invention, this invention applies widely and is suitable for the airline printer printed to not only this but paper, or other print media – it is a what thing.

[0041]

[Effect of the Invention] As mentioned above, according to this invention, while preventing forgery and an alteration by the lamination formed on the print side with the simple configuration by having covered the print side top of print media, forming the printing pattern of 1 print region memorized by the film-like sheet with the hot printing head at the memory means, the airline printer which may improve design-effectiveness is realizable.

---

[Translation done.]



**\* NOTICES \***

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

**TECHNICAL FIELD**

---

[Industrial Application] This invention is applied to the card airline printer which prints a color picture to card-like print media, concerning an airline printer, and is suitable.

---

[Translation done.]

**\* NOTICES \***

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

**PRIOR ART**

---

[Description of the Prior Art] Conventionally, the card airline printer which prints a color picture by the color hot printing method is in card-like print media. It is made as [ print / on a card / by therefore carrying out hot printing of the colors, such as yellow applied to the ink ribbon at equal intervals based on the color picture information which read optically from color photography etc. in card / this kind of / airline printer, and was photoed with \*\*\*\*\* color picture information and a video camera, a Magenta, cyanogen, and black, to a hot printing head in piles one by one on card-like print media (it being called a following card) / a color picture ] (JP,62-11370,A).

---

[Translation done.]

**\* NOTICES \***

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

**EFFECT OF THE INVENTION**

---

[Effect of the Invention] As mentioned above, according to this invention, while preventing forgery and an alteration by the lamination formed on the print side with the simple configuration by having covered the print side top of print media, forming the printing pattern of 1 print region memorized by the film-like sheet with the hot printing head at the memory means, the airline printer which may improve design-effectiveness is realizable.

---

[Translation done.]

\* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

TECHNICAL PROBLEM

---

[Problem(s) to be Solved by the Invention] By the way, in a card airline printer, the film-like sheet arranged following yellow, a Magenta, cyanogen, and the charge of color dyeing of black on the ink ribbon is imprinted on a print side with a hot printing head, and there are some which laminate on a card, without this using the lamination equipment of dedication. moreover, the thing which prints the selector-card \*\*\*\*\* ID card which is such a card airline printer, for example, is used for discernment of an ON appearance person etc. – it is – such a case – the confidentiality, i.e., security nature, of an ID card – a problem – intermediary \*\*\*\*.

[0005] For example, in the banking card, the credit card, etc., there are some which were devised so that a hologram might be allotted and neither forgery nor an alteration could be easily performed on the lamination of a card face, and the card which has high security nature is realized. Therefore, if the ID card which can perform neither forgery nor an alteration easily can be printed also in case an ID card is printed using a card airline printer, it will be thought that the usefulness as a card airline printer may be markedly improved on a target. Moreover, not only with an ID card but with a common card airline printer, if processing like the mat processing by the film photo can be performed in order to raise the dignity of a print sample for example, it will be thought that the design-effectiveness of the card itself may be improved.

[0006] this invention was made in consideration of the above point, and it tends to propose the airline printer which may improve design-effectiveness while it prevents forgery and an alteration by the lamination formed on the print side with the simple configuration – it comes out – it is.

---

[Translation done.]

\* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

MEANS

---

[Means for Solving the Problem] In order to solve this technical problem, it sets to this invention. While performing predetermined printing on the print side of the print media 37 predetermined in the color ink Y, M, C, and K arranged on the ink ribbon 62 in the airline printer 20 which imprints the film-like sheet F arranged following color ink Y, M, C, and K on the ink ribbon 62 on a print side with the hot printing head 48. When imprinting the film-like sheet F with the hot printing head 48, a memory means 86 to memorize the printing pattern of 1 print region was established, and the print side top of print media 37 was covered, forming a printing pattern in the film-like sheet F with the hot printing head 48.

---

[Translation done.]

\* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

OPERATION

---

[Function] Design-effectiveness may be improved while preventing forgery and an alteration by the lamination formed on the print side with the simple configuration by having covered the print side top of print media 37, forming the printing pattern of 1 print region memorized by the film-like sheet F at the memory means 86 with the hot printing head 48.

---

[Translation done.]

\* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

EXAMPLE

---

[Example] About a drawing, one example of this invention is explained in full detail below.

[0010] (1) In whole card airline printer block diagram 1 and drawing 2, 20 shows a card airline printer as a whole, and the printing section, the card conveyance section, the image-processing section, various kinds of drives, etc. are built in the case 21 interior. The card cassette insertion opening 22 is formed in the front face of a case of the card airline printer 20, and this card slot 22 is loaded with the card cassette 23 by which two or more loading of the card as print media was carried out. Moreover, the ribbon cassette insertion opening 24 is formed in the front face of a case 21, and the predetermined ribbon cassette 25 is inserted. Furthermore, the LED display 27 grade which displays the operating state of an electric power switch 26 or the card airline printer 20 is prepared in the front face of a case 21. The card exhaust port 28 is formed in the side face of the case 21 of the opposite side to the side in which the card cassette insertion opening 22 was formed further again, and a card [ finishing / printing ] is discharged from this card exhaust port 28.

[0011] The card conveyance section and the printing section of the card airline printer 20 are constituted here, as shown in drawing 3. That is, the card conveyance section 30 is moved to the card discharge location which shows the conveyance base 33 with an alternate long and short dash line from the card installation location shown by the drawing solid line, when the ball thread 32 prepared so that it might extend in the card conveyance direction shown by the arrow head a penetrates the nut section 34 prepared in the lower part of the conveyance base 33 and therefore makes a pulse motor 35 rotate a ball thread 32 by this. At this time, the conveyance base 33 moves to hard flow with the direction of an arrow head a, or this in the level condition, when supported free [ sliding ] by one pair of linear shafts (not shown) prepared so that it might extend in the conveyance direction shown by the arrow head a.

[0012] The card sending-out section 36 is formed in the near location of the card cassette 23, and the card 37 therefore accumulated into the card cassette 23 at this card sending-out section 36 is sent out in the direction of the conveyance base 33. Namely, the card sending-out section 36 is constituted by the kick plate 41 of the shape of a half moon fixed to the motor 38 and the motor 38 by the top face of the gearing 39 with which a rotation drive is therefore carried out, the gearing 40 which engages on a gearing 39, and a gearing 40, and the card 37 of the lowest location in the card cassette 23 begins to be kicked in the direction of the conveyance base 33 by rotating the kick plate 41 to predetermined timing.

[0013] Therefore, the card 37 which began to be kicked in the direction of the conveyance base 33 is laid on the conveyance base 33 by the roller 45 for card taking out by which a rotation drive is carried out by the motor 42 through a transfer device (not shown) while it is inserted between the roller 43 for card taking out by which a rotation drive is carried out by the motor 42, and 44. a cleaning roller 46 is formed here between the rollers 43 and 44 for card taking out, and the roller 45 for card taking out, and, thereby, it is the point at printing – the printing side of the intermediary card 37 is cleaned. Moreover, the card attaching part 47 is formed in the top face of the conveyance base 33, and this regulates horizontal migration of a card 37.

[0014] Moreover, the relief prevention members 49 and 50 fixed to the body chassis (not shown) are formed in the conveyance path of the both sides of the hot printing head 48. The relief prevention members 49 and 50 have two or more rollers 51, and prevent the relief of the card 37 from the conveyance base 33 under conveyance and printing by contacting the card 37 with which this roller 51 was laid on the conveyance base 33.

[0015] Therefore, the card 37 which printing ended here slides on the conveyance base 33 top in the direction of an arrow head a at the rollers 52, 53, and 54 for card discharge, and is discharged outside through the card exhaust port 28. Namely, the rollers 53 and 54 for discharge receive the driving force of a motor 55 through the gearings 56, 57, and 58 which engaged mutually, and rotate clockwise, and, as a result, the roller 52 for card discharge slides the card 37 on the conveyance base 33 in the direction of an arrow head a while it receives the driving force of a motor 55 through a gearing 56 and rotates clockwise. Moreover, therefore, the regulation to the direction of the front of the card 37 by the card attaching part 47 is canceled by the lever discharge shaft 59 prepared in the near location of the conveyance base 33 at this time.

[0016] In addition, in this card airline printer 20, therefore the location of the migration condition of a card 37 or the conveyance base 33 is detected by the photo sensor, and point-to-point control of a card 37 or the conveyance base 33 is carried out to a right location. Namely, a sensor S2 detects whether it was loaded with the card cassette 23. It detects whether a sensor S3

has a card 37 in the card cassette 23. Sensor S4 detects the rotation location of the kick plate 41, a sensor S5 detects whether the card 37 was taken out from the card cassette 23, it detects whether as for the sensor S6, the card 37 was laid on the conveyance base 33, and a sensor S7 detects whether the card 37 was discharged.

[0017] Moreover, based on the projection 60 for detection formed in the side face of the conveyance base 33, each sensor S8, S9, and S10 detect the location of the conveyance base 33. That is, a sensor S8 detects whether the conveyance base 33 arrived at the card supply location, sensor S9 detects whether the conveyance base 33 arrived at the printing starting position, and a sensor S10 detects whether the conveyance base 33 arrived at the card discharge location.

[0018] The printing section 31 is in the condition therefore supported to ribbon guides 63 and 64, and, therefore, rolls round the ink ribbon 62 wound around the supply reel 61 to the take-up reel 66 by which a rotation drive is carried out by the direct-current (DC) motor 65. A torque limiter (not shown) is arranged at the supply reel 61, and a back tension is given to an ink ribbon 62 with fixed torque. Moreover, the encoder for wound diameter detection (not shown) which becomes a take-up reel 66 with a photo-sensor configuration is arranged.

[0019] Yellow, the Magenta, and the charge of color dyeing of cyanogen are applied to the ink ribbon 62 by predetermined die length as a color for 1 page, respectively. Moreover, the color identification marking from which an ink ribbon 62 discriminates each color in the head location of each charge of color dyeing while the page head mark is applied to the head location of the charge of color dyeing for each page is applied. Thereby, with an airline printer 20, the photo sensor (not shown) prepared in the transit path of an ink ribbon 62 detects a page head mark and color identification marking, respectively, and performs tension control of an ink ribbon 62 based on this detection result.

[0020] The head unit 70 in which the hot printing head 48 was formed is attached in the end of the pressurization lever 72 therefore held free [ rotation ] at the rotation shaft 71 free [ attachment and detachment ]. The other end of the pressurization lever 72 is attached in the cam plate 74 free [ rocking ] through the link 73. Thereby, the head unit 70 is positioned in the lowest location which the cam plate 74 goes up and down by therefore carrying out a rotation drive on a predetermined motor (not shown), descends from the mid-position shown in drawing 3, the initial valve position which goes up from this mid-position and is estranged from an ink ribbon 62, and the mid-position, and contacts a card 37.

[0021] That is, in case the head unit 70 loads with an ink ribbon 62, it moves to an initial valve position, when a card 37 is laid on the conveyance base 33, it moves to the mid-position, and when the conveyance base 33 arrives at a printing starting position, it moves to the lowest location. Therefore in the card airline printer 20, it detects to the photo sensors S11 and S12 in which the rise-and-fall condition of this head unit 70 was prepared near the notch of the cam plate 74. The hot printing head 48 becomes with an edge two-dimensional configuration, and contacts the \*\*\*\*\* card 37 crosswise [ of the card 37 perpendicular to space / whole ]. If a card 37 moves in the direction of an arrow head a by this, it is made as [ carry out / to the whole printing side surface of a card 37 / the print of the image of a \*\*\*\*\* request ].

[0022] the printing operations sequence SP 0 which shows actual printing by this card airline printer 20 to drawing 4 and drawing 5 here – therefore, it performs. namely, – first – the close intermediary from the printing operations sequence SP 0 – in the following step SP 1, it judges whether the card 37 was picked out from the card cassette 23, and the card 37 was taken out in the following step SP 2, and when a negative result is obtained, error processing which displays \*\*\*\*\* , a card piece, etc. on a step SP 3 is performed.

[0023] On the other hand, when a card 37 is taken out, if it judges whether the \*\*\*\*\* card 37 was taken out to a step SP 4, and the card 37 was taken out in a step SP 5 and a negative result is obtained, a step SP 4 will be repeated and, in the case of an affirmation result, the \*\*\*\*\* card 37 will be laid on the conveyance base 33 at the following step SP 6. Then, in a step SP 7, the conveyance base 33 is positioned in the location of the hot printing head 48, and the conveyance base 33 is suspended. In addition, the hot printing head 48 is in the location (initial valve position) which rose at this time.

[0024] Next, in a step SP 8, the drive motor of the cam plate 74 drives, the hot printing head 48 is taken down to the mid-position, and the head of 1 page of an ink ribbon 62 is pulled out in the following step SP 9. Then, in the following step SP 10, the drive conditions of DC motor 65 are set up according to the wound diameter which detected the wound diameter of an ink ribbon 62 and was detected in a step SP 11.

[0025] Then, in a step SP 12, the drive motor of the cam plate 74 works again, the hot printing head 48 is taken down to the lowest location, DC motor 65 is driven in a step SP 13, rolling up of an ink ribbon 62 is started, and only the number (alpha) of predetermined Rhine moves the conveyance base 33 in a step SP 14. Next, the print of 1 classification by color is started in a step SP 15, and it sets to a step SP 16, and is a print of 1 classification by color. A print is carried out by 965 lines, in the following step SP 17, the print of 1 classification by color is ended, an ink ribbon 62 is exfoliated, and only the number (beta) of predetermined Rhine moves the conveyance base 33.

[0026] Then, when the hot printing head 48 is raised to the mid-position in a step SP 18, it judges whether the print of 3 classification by color was completed in the following step SP 19 and a negative result is obtained, it sets to the following step SP 20, and is about the conveyance base 33. It returns only several Rhine minutes which added alpha and beta Rhine to 965 lines. Moreover, in the following step SP 21, the head of the ink ribbon 62 of the following color is pulled out for print processing of \*\*\*\*\* 1 classification by color to the above-mentioned step SP 12 after \*\*\*\*\* . If an affirmation result is soon



obtained at a step SP 19, in a step SP 22, a card 37 is discharged and it is made as [ carry out / on a card 37 / it does in this way and / a color print ].

[0027] (2) the card airline printer of an example – do to be able to print ID card 37 used for discernment of an ON appearance person etc. as a card 37 in the card airline printer 20 of this example here – an ON appearance person's name, a photograph of his face, etc. are printed as a print side. Moreover, the print side top of this ID card 37 is laminated with the film-like sheet which the repeat pattern of a predetermined alphabetic character etc. spaced and was arranged in the shape of a pattern.

[0028] In the case of this example, as an ink ribbon 62 is shown in drawing 5 R> 5, the film-like sheet F is arranged following the yellow Y applied by predetermined die length as a color for 1 page, respectively, Magenta M, and each charge of color dyeing of Cyanogen C. This imprints and laminates the film-like sheet F on the print side of ID card 37 with the hot printing head 48 in this card airline printer 20.

[0029] Moreover, ID card 37 which it spaces through the film-like sheet F by the pattern repeatedly, and a pattern is formed, neither forgery nor an alteration can do information on a print side easily at this time when [ which laminate this film-like sheet F ] it was printed by the film-like sheet F by printing the repeat pattern of a predetermined alphabetic character etc. with the hot printing head 48, but has high security nature can be printed.

[0030] In practice, this card airline printer 20 consists of circuit blocks as shown in drawing 6 , and is required. That is, the print data S1 inputted from a host computer (not shown) are once written in the frame memory 80 (80Y, 80M, 80C, 80K) which has the capacity of 1 print region for every color according to a color. This writing is controlled by the bus from CPU81 through the memory controller 82 connected to CPU81.

[0031] therefore, the print data S1 written in this frame memory 80 were read to the memory controller 82 to predetermined timing, among these the color print data SY, SM, and SC corresponding to yellow, a Magenta, and cyanogen responded to printing in the color tone ready circuit 83 (83Y, 83M, 83C) for every color, respectively – color adjustment is carried out and it is inputted into a selector 85 through the masking circuit 84. Moreover, when there is no need for color adjustment or masking, color print-data SK for black written in the frame memory 80 is read to predetermined timing, and is sent out to a selector 85 as it is.

[0032] Furthermore, with the card airline printer 20 of this example, it has a frame memory 80 and the lamination memory 86 which has the storage capacity of 1 print region similarly, and lamination print-data SF showing the repeat pattern of the predetermined alphabetic character formed in the film-like sheet F etc. is once written in. Therefore, it is controlled by the memory controller 82 like [ this lamination memory 86 ] a frame memory 80. Moreover, when there is no need for color adjustment or masking like black color print-data SK, lamination print-data SF written in the lamination memory 86 is read to predetermined timing, and is sent out to a selector 85 as it is.

[0033] Therefore, according to printing operations sequence which was mentioned above to drawing 4 and drawing 5 , a selector 85 makes sequential selection of the color print data SY, SM, and SC corresponding to yellow, a Magenta, and cyanogen, color print-data SK for black, and lamination print-data SF, considers as the printout data S2, and is sent out to control of CPU81 in a gamma correction circuit 87, respectively. Therefore, concentration resistance-welding-time conversion, i.e., gamma amendment, is performed, the printout data S3 obtained as a result are changed into print energy S4 by the thermal head controller 88, and a gamma correction circuit 87 is printed with the hot printing head 48 by the heat correction factor set up based on control of CPU81.

[0034] In the case of this card airline printer 20, in the above configuration, the sequential input of yellow, a Magenta, cyanogen and the black color print data SY, SM, SC, and SK, and lamination print-data SF is carried out as print data S1 which express a predetermined print side from a host computer side. Among these, color print data are written in the frame memory 80 (80Y, 80M, 80C, 80K) corresponding to each color, and lamination print-data SF is written in the lamination memory 86.

[0035] The print data SY, SM, SC, SK, and SF written in a frame memory 80 and the lamination memory 86 are masked while color adjustment is carried out if needed, and they are sent out to a selector 85. In a selector 85, while doing gamma amendment of at the order of the color print data SY, SM, SC, and SK and lamination print-data SF according to color printing sequence, it changes into print energy and the hot printing head 48 is supplied.

[0036] Thereby, with this card airline printer 20, while color-printing a name, a photograph of his face, etc., for example as an ON appearance person's identification information, it is made as [ print / ID card 37 laminated with the film-like sheet F which the repeat pattern of a predetermined alphabetic character etc. spaced and was arranged in the shape of a pattern ]. Thus, by laminating with the film-like sheet F with which ID card 37 was spaced and the pattern was allotted, ID card 37 which neither forgery nor an alteration can be performed easily, but has high security nature with the simple configuration which newly formed the lamination memory 86 can be printed.

[0037] By having made it imprint, driving the hot printing head 48 with the lamination print data written in the lamination memory 86, when imprinting the film-like sheet F with the hot printing head 48 according to the above configuration ID card 37 can be laminated with the film-like sheet F with which the printing pattern according to lamination print-data SF was formed, and the card airline printer 20 which can print easily ID card 37 with which forgery and an alteration have difficult and high

security nature can be realized.

[0038] (3) Although a card is laminated with the film-like sheet which spaced by the repeat pattern of a predetermined alphabetic character etc. as lamination print data, and formed the pattern in other examples, in addition above-mentioned examples and high security nature was obtained Not only this but a checker, a concavo-convex predetermined pattern, etc. are sufficient as lamination print data, and if it does in this way, they can perform processing like the mat processing by the film photo on a print side, and may improve the design-effectiveness of the card itself.

[0039] moreover, an above-mentioned example – setting – the frame memory for color print data – in addition, although the case where the lamination memory for lamination print data was prepared was described, when the frame memory for color printing is used by time sharing, even if it also uses lamination print data by time sharing following the data for color printing, the same effectiveness as an above-mentioned example can be realized.

[0040] in a further above-mentioned example, although applied to the card airline printer which prints predetermined information on print sides, such as an ID card, as an airline printer by this invention, this invention applies widely and is suitable for the airline printer printed to not only this but paper, or other print media – it is a what thing.

---

[Translation done.]

\* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

DESCRIPTION OF DRAWINGS

---

[Brief Description of the Drawings]

[Drawing 1] It is the perspective view showing the appearance configuration of one example of the airline printer by this invention.

[Drawing 2] It is the perspective view showing the appearance configuration of one example of the airline printer by this invention.

[Drawing 3] It is the approximate line-side elevation showing the conveyance section and the printing section in one example of the airline printer by this invention.

[Drawing 4] It is the flow chart with which explanation of the printing actuation in the card airline printer of an example is presented.

[Drawing 5] It is the flow chart with which explanation of the printing actuation in the card airline printer of an example is presented.

[Drawing 6] It is the approximate line Fig. with which explanation of the ink ribbon used for the card airline printer of an example is presented.

[Drawing 7] It is the block diagram showing the circuitry of the card airline printer of an example.

[Description of Notations]

20 [ .. Conveyance section, ] .... A card airline printer, 21 .. A case, 28 .. A card exhaust port, 30 31 [ .. Nut section, ] .... The printing section, 32 .. A ball thread, 33 .. A conveyance base, 34 36 [ .. The roller for card taking out, ] .... The card sending-out section, 37 .. A card, 41 .. A kick plate, 43-45 46 .... A cleaning roller, 47 .. A card attaching part, 48 .. Hot printing head, 49 50 [ .. A lever discharge shaft, 60 / .. The projection for detection, 61 / .. A supply reel, 62 / .. An ink ribbon, 66 / .. Take-up reel ] .... A relief prevention member, 51A-51D .. A roller, 52-54 .. The roller for card discharge, 59 70 [ .. A cam plate, S2-S12 / .. Sensor. ] .... A head unit, 72 .. A pressurization lever, 73 .. A lever, 74

---

[Translation done.]

\* NOTICES \*

JPO and NCIPJ are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

DRAWINGS

---

[Drawing 1]

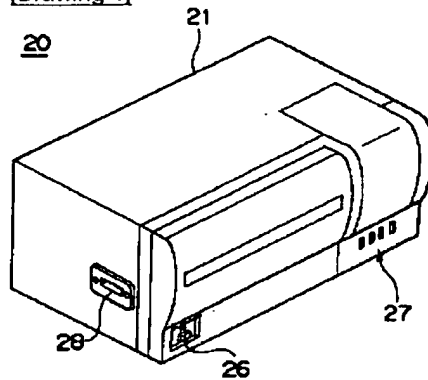


図1 外觀構成(1)

[Drawing 2]


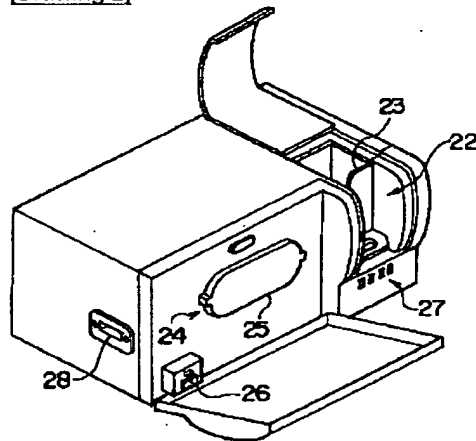


図2 外觀構成(2)

[Drawing 3]

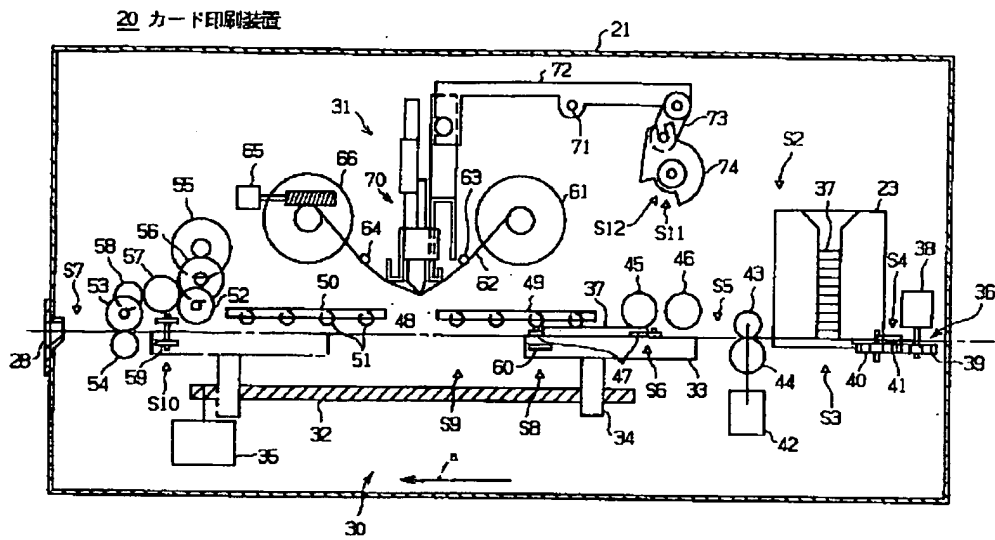

[Drawing 4]

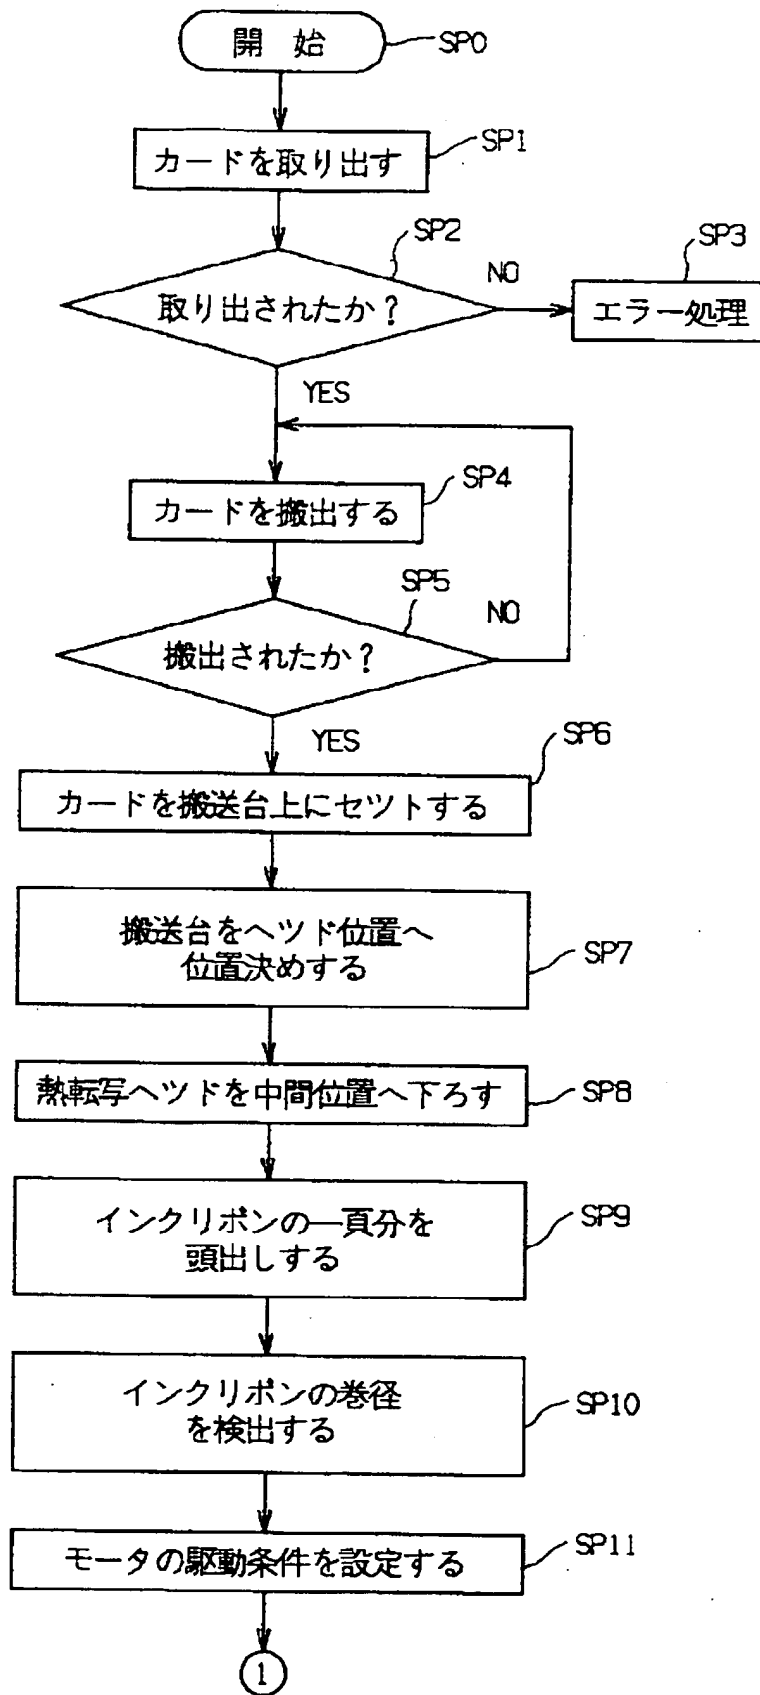


図4 印刷動作手順(1)

[Drawing 5]

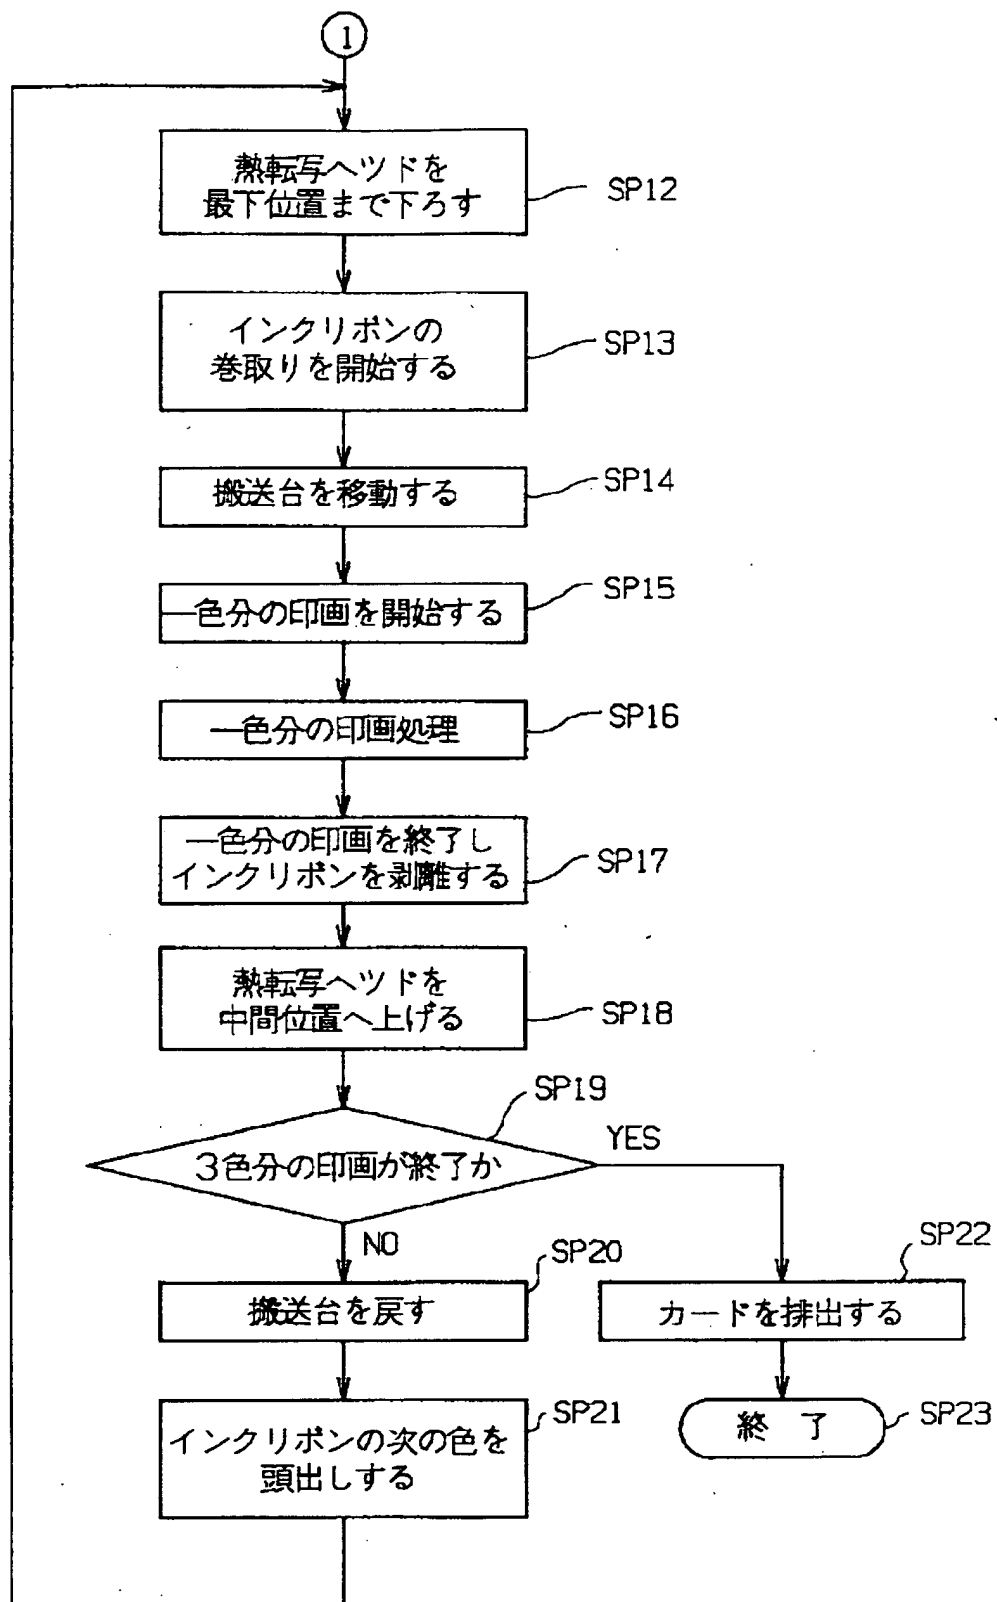


図5 印刷動作手順(2)

[Drawing 6]

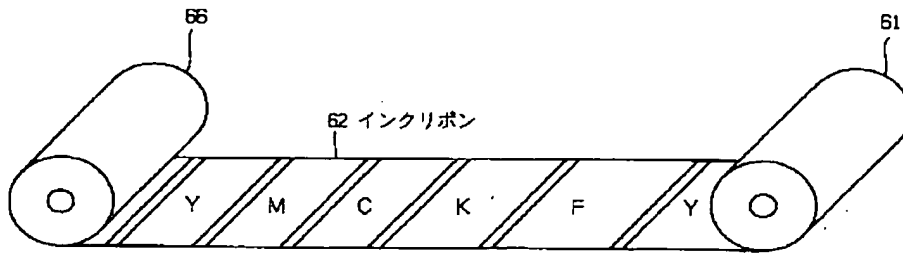


図6 実施例のインクリボン

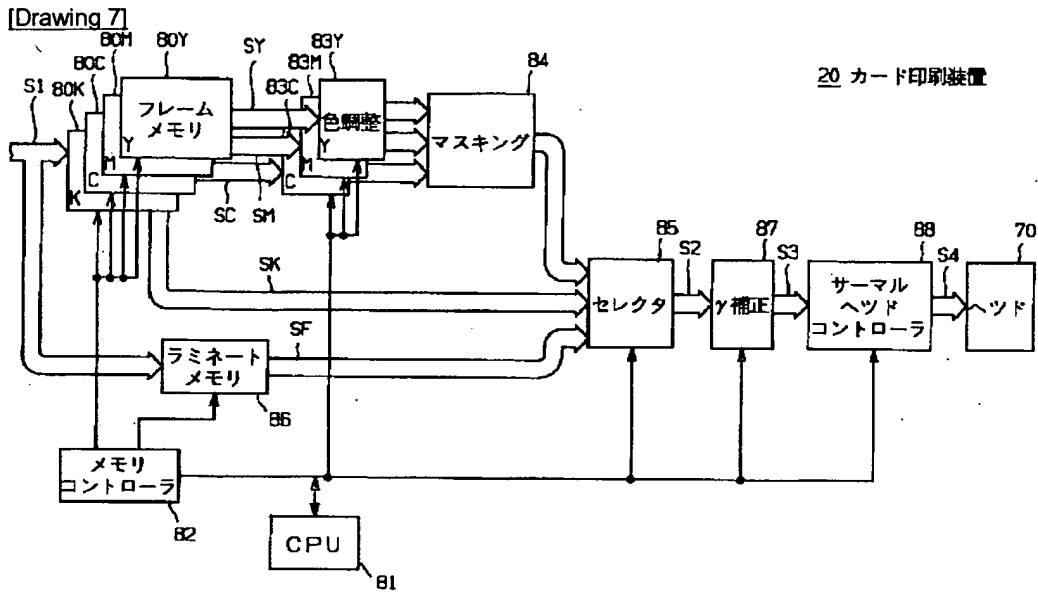


図7 実施例によるカード印刷装置

[Translation done.]



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**